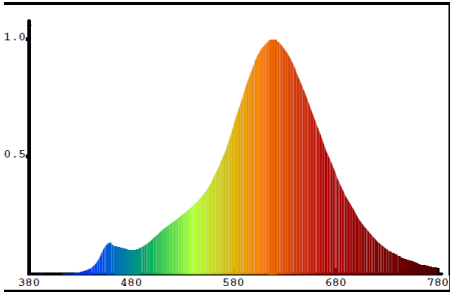


REGULATION (EU) 2019/2015**Annex V, Table 3****Product Information sheet**

Supplier' s name or trade mark:	
Supplier' s address:	
Model identifier:	
Type of light source:	
Lighting technology used:	LED
Led type:	other electric interface
Power supply mode	DC adapter
Dimming or not:	no
High luminance light source:	no
Anti-glare shield:	no
Product parameters	
Parameter	Value
General product parameters:	
Energy consumption in on-mode (kWh/1 000 h), rounded up to the nearest integer:	2kWh/1 000 h
Useful luminous flux (Φ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°):	70 lumen in a wide cone (360°)
On-mode power (P_{on}), expressed in W:	2W
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal:	/

Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre):	Height:	400mm
	Width:	30mm
	Depth:	40mm
Claim of equivalent power		/
<i>Parameters for directional light sources:</i>		
Peak luminous intensity (cd):		/
<i>Parameters for LED and OLED light sources:</i>		
R9 colour rendering index value:		1
the lumen maintenance factor:		0,9
<i>Parameters for LED and OLED mains light sources:</i>		
displacement factor (cos ϕ 1):		0,00
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.:		[NO]
Flicker metric (Pst LM):		0,0

Coen Bakker Deco B.V.	
Smeetsweg 4a 1738 DK WAARLAND NETHERLANDS	
241151	
Led string light	
Led qty	10pcs
Input voltage	220-240V
Output voltage	3.4V
Timing or not	yes
Connected light source (CLS):	no
Output current	588MA
Parameter	Value
Energy efficiency class:	G
Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set:	[2600K]
Standby power (P_{sb}), expressed in W and rounded to the second decimal:	0
Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set:	[80]

<p>Spectral power distribution in the range 250 nm to 800 nm, at full-load:</p>	
<p>If yes, equivalent power (W)</p>	<p>/</p>
<p>Chromaticity coordinates (x and y):</p>	<p>X:0.485 y:0.427</p>
<p>Beam angle in degrees, or the range of beam angles that can be set:</p>	<p>/</p>
<p>Survival factor:</p>	<p>0, 90</p>
<p>Colour consistency in McAdam ellipses:</p>	<p>6, 2</p>
<p>If yes then replacement claim (W)</p>	<p>/</p>
<p>Stroboscopic effect metric (SVM):</p>	<p>0, 0</p>